



ISOJOINT®

Meter Service Fitting

The Positive Solution to Cathodic Isolation of Meters



from
**ADVANCE
PRODUCTS &
SYSTEMS, INC.**

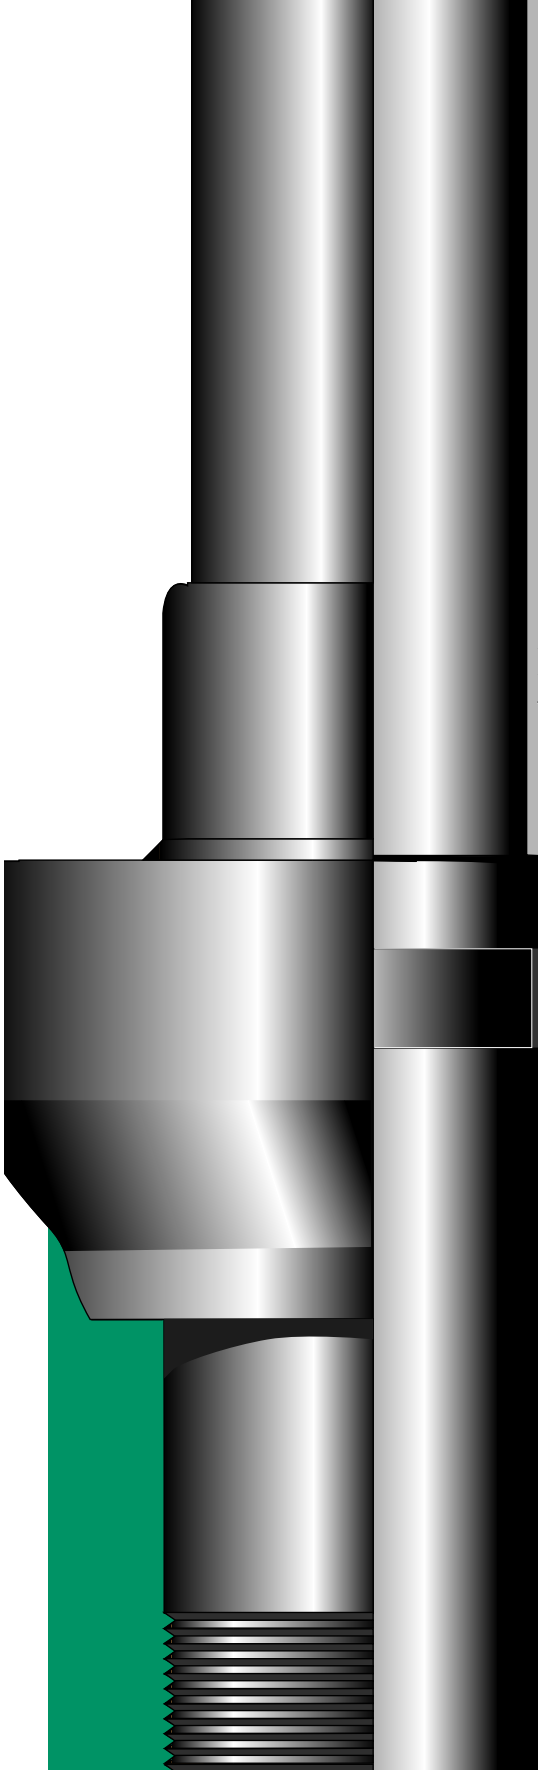

ASTM A105 Steel

Buna N Seal

Polycarbonate Insulating
Bushing

Carbon Steel A106 Gr B




- No maintenance required for twenty years or more
- Easy, accurate, and safe installation
- Available for welding line without leakage or damage to internal insulating material
- Leak Proof one piece or monolithic fitting
- Internally and externally coated with epoxy
- The joint has electrical and dielectrical characteristics and strong resistance to chemical agents
- High tensile and bending load resistance
- Suitable for above ground or below ground installation up to 10 BAR or 150 PSI constant operating pressure
- Sealing guaranteed if pressure exceeds maximum operating pressure for intermitted periods; hydraulically tested to 15 BAR or 220 PSI
- Two internal seals, one dielectric bushing, the other a rubber pressure seal
- Reusable many times over the life of the installation

Reison®

上海睿舜流体技术有限公司
Shanghai Reison Fluid Tech Co., Ltd.

ISOJOINT®

Meter Service Fitting

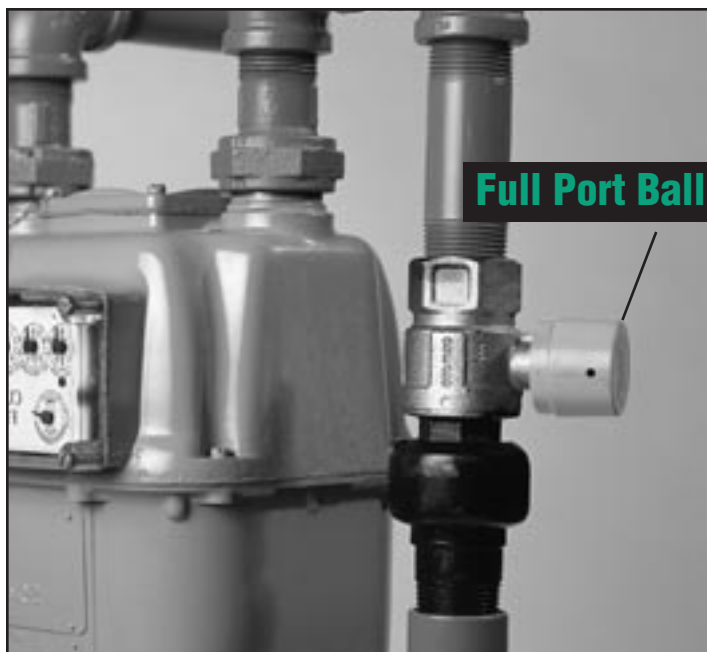

Full Port Ball Valve

Meter Service Fittings are manufactured in accordance with the highest technical standards which guarantee:

- Mechanical requirements are met for the specific need of meter installations.
- Insulating requirements are achieved and surpass the electrical characteristics of the product transported through the pipe.



When ordering, please give the following information:

1. Diameter of pipe
2. Style, Male/Male, Male/Female, Female/Female, Weld/Male, Weld/Female, Weld/Weld

Water Service Fittings

Now available from APS, Copper to Steel Water Service Fittings for Water Service Lines.

Available:
 MxM NPT Thread
 MxF NPT Thread
 MNPT x Weld
 FNPT x Weld
 Weld x Weld
 F x F NPT

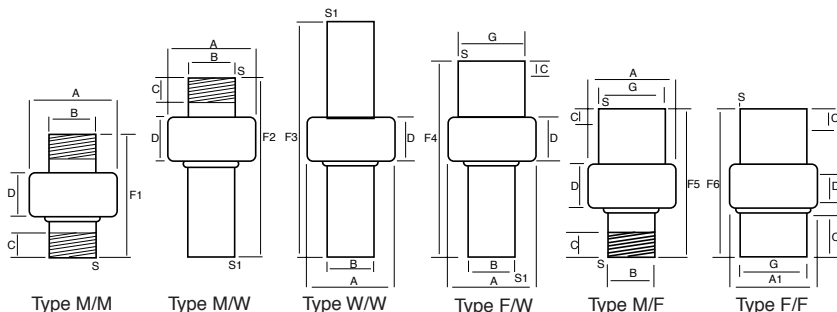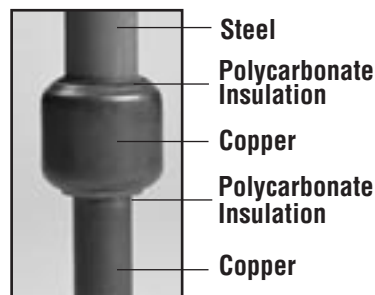

Inside Dia.	A	A1	B	C	D	F1	F2	F3	F4	F5	F6	G	S	S1
1/2"	1 13/16"	1"	13/16"	3/4"	1 1/8"	3 11/16"	5 7/16"	8 3/16"	5 7/16"	3 3/4"	1"	1 1/16"	5/32"	1/8"
3/4"	1 15/16"	2 1/16"	1 1/16"	3/4"	1 3/16"	3 15/16"	6 5/8"	9 3/8"	6 5/8"	3 15/16"	3 1/16"	1 1/4"	5/32"	1/8"
1"	2 3/16"	2 3/8"	1 5/16"	3/4"	1 1/4"	4 11/16"	7 1/4"	9 1/2"	7 1/4"	4 1/16"	3 7/16"	1 1/2"	5/32"	5/32"
1 1/4"	2 1/2"	2 3/4"	1 11/16"	7/8"	1 3/8"	5 1/4"	8 3/16"	10 1/2"	8 3/16"	4 7/16"	3 13/16"	1 15/16"	5/32"	5/32"
1 1/2"	2 13/16"	3 3/16"	1 7/8"	7/8"	1 7/16"	5 5/8"	8 3/8"	10 15/16"	8 3/8"	4 13/16"	4 1/2"	2 1/8"	5/32"	5/32"
2"	3 5/16"	3 1/2"	2 3/8"	7/8"	1 1/2"	5 7/8"	8 1/2"	11 1/8"	8 1/2"	5 7/16"	4 3/4"	2 1/2"	3/16"	5/32"
2 1/2"	4 7/16"	1"	2 15/16"	1 3/16"	2 1/4"	7 13/16"	10 1/2"	14 1/16"	10 1/2"	7"	1"	3 1/2"	3/16"	3/16"
3"	4 7/8"	1"	3 1/2"	1 3/8"	2 3/8"	8 1/2"	11 3/4"	15 5/8"	11 3/4"	7 7/8"	1"	3 15/16"	3/16"	3/16"

Reison®

上海睿舜流体技术有限公司
 Shanghai Reison Fluid Tech Co., Ltd.

上海市嘉定区嘉美路1385号新1号楼1层
 1 F, New Building #1, No. 1385 Jiamei Road,
 Jiading District, Shanghai, China
 电话/Tel: +86 21 62988993, 62988995, 33518901
 网址/Website: www.reison.net

